



Features

- Fanless and rugged design
- Intel® Atom™ Processor E3845 quad-core 1.91GHz
- Dual SIM cards + dual WWAN modules supported
- Wide operating temperature : -40°C~70°C
- Outside accessible SD and SIM slots supported
- 3 x mini-PCIe sockets
- Optional uBlox GPS Module, support GPS, Glonass and QZSS singals
- Compliant with MIL-STD-810G
- Optional CAN BUS2.0B and 4-channel CCTV
- 4 x COM, 1 x USB3.0, 2 x USB2.0, 4-in/4-out GPIO

System

CPU	Soldered onboard Intel®Atom™ processor E3845 quad-core
Memory	1 x 204-pin SO-DIMM socket, supporting DDR3L 1066/1333 MHz, up to 8GB SDRAM
Chipset	Intel Atom™ processor E3845
Graphics	Integrated Intel® HD Gen. 7 Graphics
SATA	1 x Serial ATA port with 300MB/s HDD transfer rate 1 x mSATA
Connectivity	802.11 a/b/g/n Wireless LAN Mini-card (optional)
LAN Chipset	1 x Intel® i210IT GbE controller
Watchdog Timer	1~255 levels reset

I/O

Serial Port	2 x RS-232/485 ports w/ DB-9 connectors, rear side 2 x RS-232 ports w/ DB-9 connectors, rear side Optional : 1 x CAN BUS2.0B w/ DB-9 connector Optional : 1 x 4-ch CCTV w/ DB-9 connector
USB Port	1 x type A USB 3.0 port, front side 2 x type A USB 2.0 ports, rear side
LAN	1 x RJ-45 port for GbE, rear side
Video Port	1 x DVI-D female connector, rear side 1 x VGA with DB15 female connector, rear side
Digital I/O	1 x 8-bit digital I/O, 4-in/4-out w/ DB-15 Male connector, 2KV isolated protection, front side
Antenna	5 x SMA-female connectors' holes for external antennas, front side
Audio	2 x 3.5mm phone jacks for Line-out & MIC-in (2W pre-amplified), rear side 1 x Mini-PCIe slot for optional WiFi/Bluetooth module
Expansion Bus	2 x Mini-PCIe slot interconnected with SIM card sockets for optional HSUPA/LTE module 2 x SIM sockets (outside accessible)

Storage

Type	1 x 2.5" drive bay for SSD 1 x mSATA 1 x outside accessible SD socket with cover
------	--

Environmental

Operating Temp.	-40°C ~ 70°C (-40°F ~158°F), ambient w/ air flow, w/SSD
Storage Temp.	-40°C ~85 °C (-40°F ~ 185°F)
Operating Humidity	5% ~ 95% @ 70°C (non-condensing)
Vibration (SSD)	Operating: MIL-STD-810G, Method 514.6, Category 4 and EN61373 Category 1 Class B Non-operating: MIL-STD-810G, Method 514.6, Category 24 minimum integrity test
Shock (SSD)	Operating: MIL-STD-810G, Method 516.6, Procedure functional shock=20g Non-operating : MIL-STD-810G, Method 516.6, Procedure V, crash hazard shick test=75g

Qualification

Certification	CE, FCC Class A, E13 Mark
---------------	---------------------------

Power Requirement

Power Input	DC 9~36V input, w/ 3-pin terminal bolck
Power Consumption	Max. 30W
Power Management	Power ignition, power on/off delay controlled by software

Mechanical

Construction	Aluminum alloy
Mounting	Wall-mount
Weight	1.5 kg
Dimensions (W x H x D)	200 x 54 x 180 mm (7.87" x 2.13" x 7.09")


OS Support

W7 Pro / Embedded, Linux Kernel 3.1X


Ordering Information

IB-E3845C	Vehicle Barebone System w/ Intel® Atom™ Quad-core E3845 SoC, w/o memory and storage
-----------	---

Front View

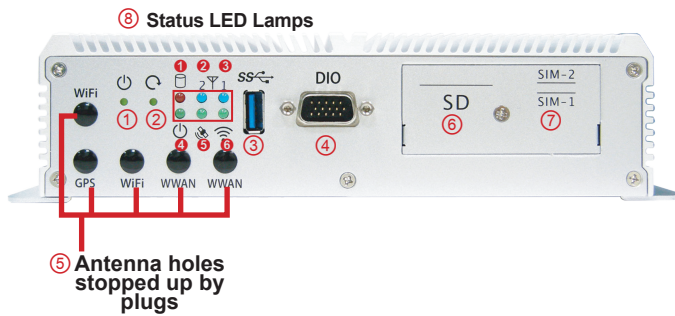


Rear View

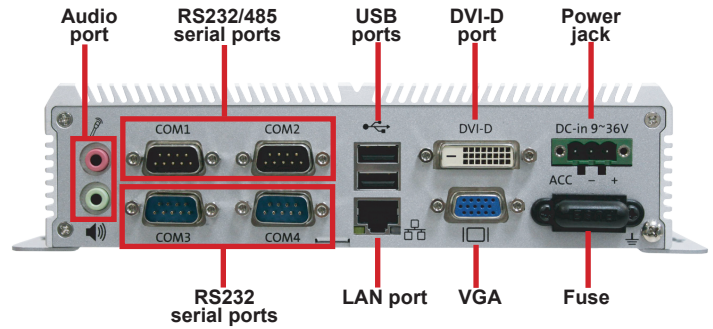

I/O

No.	Description	No.	Description
①	Power button	⑤	Antenna holes stopped up by plugs
②	Reset button (accessible with a pin)	⑥	SD card slot
③	USB 3.0 port	⑦	SIM1/2 card slots
④	DIO port	⑧	LED Indicators

Dimensions

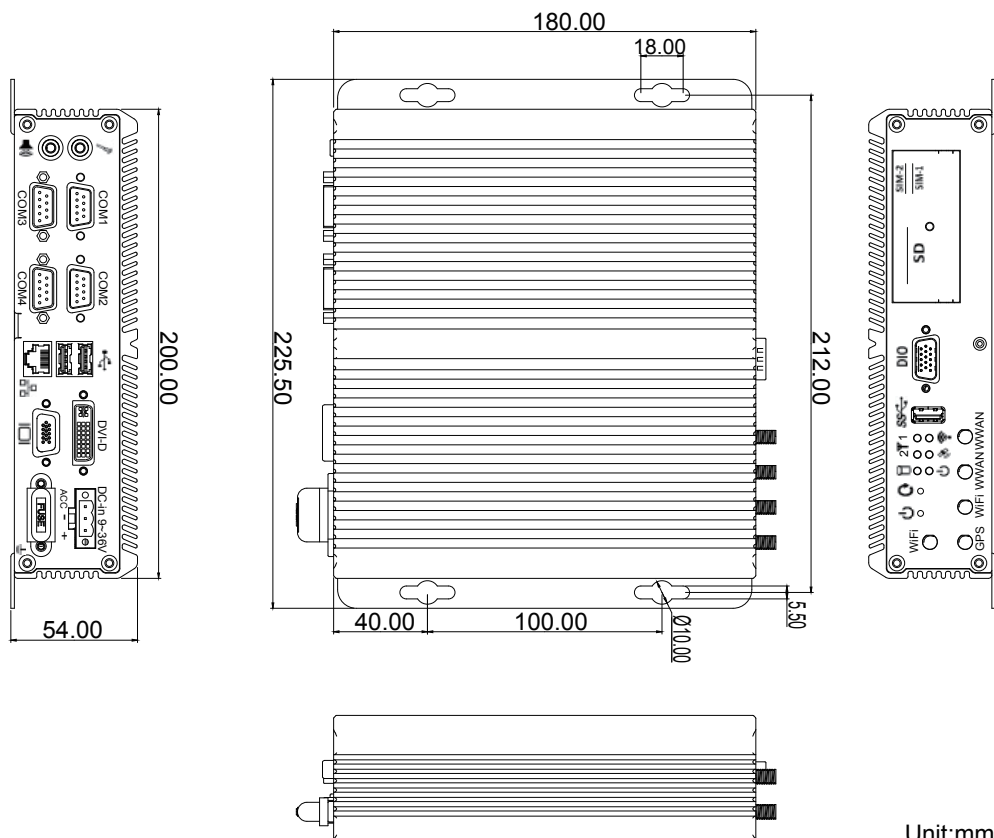

Unit:mm