


Features

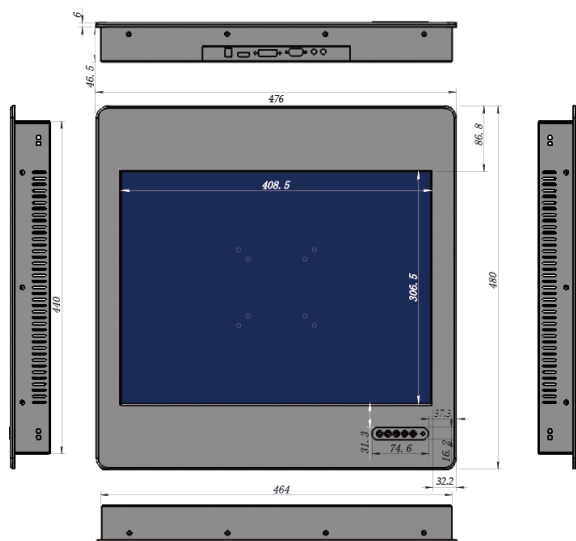

Rejitek provides a full range of ruggedized monitors with brilliant displays and a rugged metal construction. The displays come in a wide range of sizes and features including touch screen technology, IP-rated protection, military-grade standards, and high brightness sunlight readable displays.

- Industrial-grade LCD screen
- Options for PCAP or Resistive Touchscreen.
- Options for Waterproof, dustproof and explosion-proof: IP65/IP66
- Dense ventilation holes on the back, efficient heat dissipation.
- Uses the most advanced LED backlight technology.
- Dimension: 476mmx480mmx52.5mm

Specification

Product	Model Name	IM-32201S-30UX5A
Construction	Type	Panel Mount Monitor (Option Rack Mount)
Panel	Size	20.1"
	Max Resolution	1600x1200@60Hz/4:3 UXGA
	Frame Rate	4:3
	View Angle(From Center)	L/R: 80/80; U/D: 80/80 (Typ.)(CR≥10)
	Brightness	300 cd/ m ² (Options: 1000 cd/ m ²)
	Contrast Ratio	≥800:1
	Response Time	≤ 35ms
	Number of colors:	≥16.7 million
I/O	Display Ports	VGA, HDMI, DVI
	Audio System	Option
Power	Power Supply	External DC, Input Voltage DC: 12V Option 9-36VDC;
Environment	Temperature	Operating: 0°C to 50°C; Storage: -20°C to 60°C
	Humidity	Operating: 20% to 80% (No Condensation); Storage: 10% to 90% (Non-condensing)
Features	User Controls	OSD Buttons: Menu, Up, Down, Select, Power; (Options: fly cable, RJ45 cable)
Dimension	Size(W x L x H)	476mmx480mmx52.5mm
Certification	EMC	FCC, CE
Options	Touchscreen	PCAP: Projected Capacitive Touchscreen, Touch Points : 10 Points Resistive Touchscreen
	Performance	IP65(Front)
	Protection	Compliance MILSTD 810G
	Mounting Options	100mm or 75mm VESA Mounting, Open Bracket Mounting
Case Color	Case/ Frame Color	Black Coating Metal

Ordering Information

Model Name	Description
IM-32201S-30UX5A	Brightness 300 cd/m ²
IM-32201S-A0UX5A	Brightness 1000 cd/m ²

Options: I/O Connectors

Display Ports I/O



HDMI



DisplayPort




VGA



DVI

Power Ports I/O



DC 9-36V
phoenix connector



DC 12V
Power connector



AC 110/220V
Power connector

Model Name

IM-33650W-B5FH1A

